

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.  
For more information visit [www.intechopen.com](http://www.intechopen.com)



# Analog Circuit for Motion Detection Applied to Target Tracking System

Kimihito Nishio

*Tsuyama National College of Technology  
Japan*

## 1. Introduction

It is necessary for the system such as the robotics vision and the monitoring camera to detect the motion of the object and recognize the target in real time. However, this is difficult in conventional image processing systems constructed with a charge coupled device (CCD) camera and Neumann-type computer since information processing in this setup is accomplished in a time-sequential way. On the other hand, real-time image processing is easily performed in biological systems constructed with the retina and the brain since information processing is achieved in massively parallel nerve networks which have a hierarchical structure.

The biological vision system constructed with the retina and brain can detect the motion of the object in real time and judge the target instantly. The complementary metal oxide semiconductor (CMOS) circuits based on the biological vision system can be expected to realize the high speed processing system since each unit circuit operates in parallel as well as the signal processing of the biological vision system. Many researchers proposed the CMOS circuits for edge detection and motion detection based on the biological vision system (Mead, 1989.; Moini, 1999.; Asai et al., 1999b.; Liu., 2000.; Yamada et al. 2001.; Nishio et al. 2003). These circuits are characterized by the high speed processing.

Particularly, there are neurons for tracking the target in the superior colliculus of the brain. The simple target tracking model was proposed based on the signal processing of the brain. The cells for generating the motion signal were introduced at the first stage of the model. The motor for tracking the target was controlled by the motion signal.

Recently, analog CMOS circuits were proposed based on the model for tracking the target (Asai et al., 1999a.; Liu et al., 2001.; Moini, 1999). At the first stage of the circuits, analog motion detection CMOS circuits (Asai et al., 1999b.; Liu., 2000.) based on the biological vision system were introduced for generating the motion signal.

Recently, we proposed simple analog CMOS circuits for generating the motion signal based on the biological vision system (Nishio et al. 2004.; Nishio et al. 2007). The circuit consists of the half of the number of transistors utilized to previous proposed motion detection circuit, which is used at the first stage of the tracking system. The realization of the simple system for tracking the target can be expected by using our circuits to the first stage of the tracking system.

In this study, simple analog CMOS circuit for motion detection was proposed based on the biological vision system. And, I tried to develop the test system for tracking the target based

on the biological vision system. The system was constructed with the analog CMOS circuit for motion detection.

The analog motion detection circuit is characterized by high speed processing because the unit circuits process in parallel as well as the information processing of the retina and brain. The analog motion detection circuit is characterized by compact structure. The unit circuit is constructed with about 17 MOS transistors by using analog technology.

In this chapter, the following topics (1)-(4) are described.

1. Motion detection model based on the biological vision system
2. Simple analog CMOS circuit for motion detection
3. Target tracking model based on the biological vision system
4. Test system for tracking the target using analog motion detection circuit

## 2. Motion detection model based on the biological vision system

Figure 1 shows the unit model for motion detection (Reichardt, 1961). We call the model the correlation model. The motion direction and velocity of the target can be detected by the output signal generated by the model. In this section, I describe the details of the model.

The model (elementary motion detector; EMD) is constructed with the large monopolar cell  $L$ , the delay neuron  $D$  and the correlator  $C$ . The photoreceptor  $P$  is the input part.

The transient response of each cell when the target (object) moves toward the right side is shown in Fig. 1(b). The  $P$  outputs the signal which is proportional to light intensity. The signal of  $P_1$  is input to  $L_1$ . When the target moves on  $P_1$ ,  $L_1$  outputs the pulsed signal. The pulsed signal of  $L_1$  is input to  $D$ . Then, the signal of  $D$  shows the maximum value. After the target moves away from  $P_1$ , the signal of  $D$  decreases. When the target moves on  $P_2$ ,  $L_2$  generates the pulsed signal by inputting the signal of  $P_2$ . The signal  $V_E$  which is proportional to the signal of  $D$  is output when the pulsed signal of  $L_2$  is input to  $C$ . The time between the generation of the pulsed signal of  $L_1$  and that of  $L_2$  is equal to the time that the target moves from  $P_1$  to  $P_2$ . The time is inversely proportional to the velocity of the target. Thus,  $V_E$  is proportional to the velocity of the target.

When the target moves toward the left side,  $V_E$  is 0. When the target moves toward the right side, the model generate the signal  $V_E$ . This model can detect the motion of the right direction. Thus, it is able to detect the various motion direction by using the model.

## 3. Simple analog CMOS circuit for motion detection

Figure 2 shows the unit analog motion detection circuit. The circuit was proposed by mimicking EMD in Fig. 1. The circuit can generate the signals for detecting the motion direction and velocity. The operation principles of the circuit are described in this section.

The functions of  $D$  and  $C$  in Fig. 1 are added to our simple circuit (Nishio et al. 2004.; Nishio et al. 2007). The proposed circuit is simple structure, which consists of 17 MOS transistors and 3 capacitors. The photodiode  $PD$  is utilized to the input part. When the target (light) moves on  $PD_1$ , the voltage  $V_{L1}$  shows about the supply voltage  $V_{DD}$ . After the time  $t_L$ , the voltage  $V_{LD}$  becomes about  $V_{DD}$  by the capacitor  $C_L$ . Since the pMOS transistor  $MP_1$  and nMOS transistor  $MN_1$  used as the switches turn on for  $t_L$ , the current  $I_{L1}$  flows into  $MP_1$  and  $MN_1$ . Then, the voltage  $V_D$  shows the maximum value by the integration circuit constructed with the capacitor  $C_D$  and the nMOS transistor  $MN_2$  where the voltage  $V_{G1}$  is set to constant value.  $V_D$  is converted to the current  $I_D$  by the nMOS transistor  $MN_3$ . After  $t_L$ ,  $MP_1$  turns off

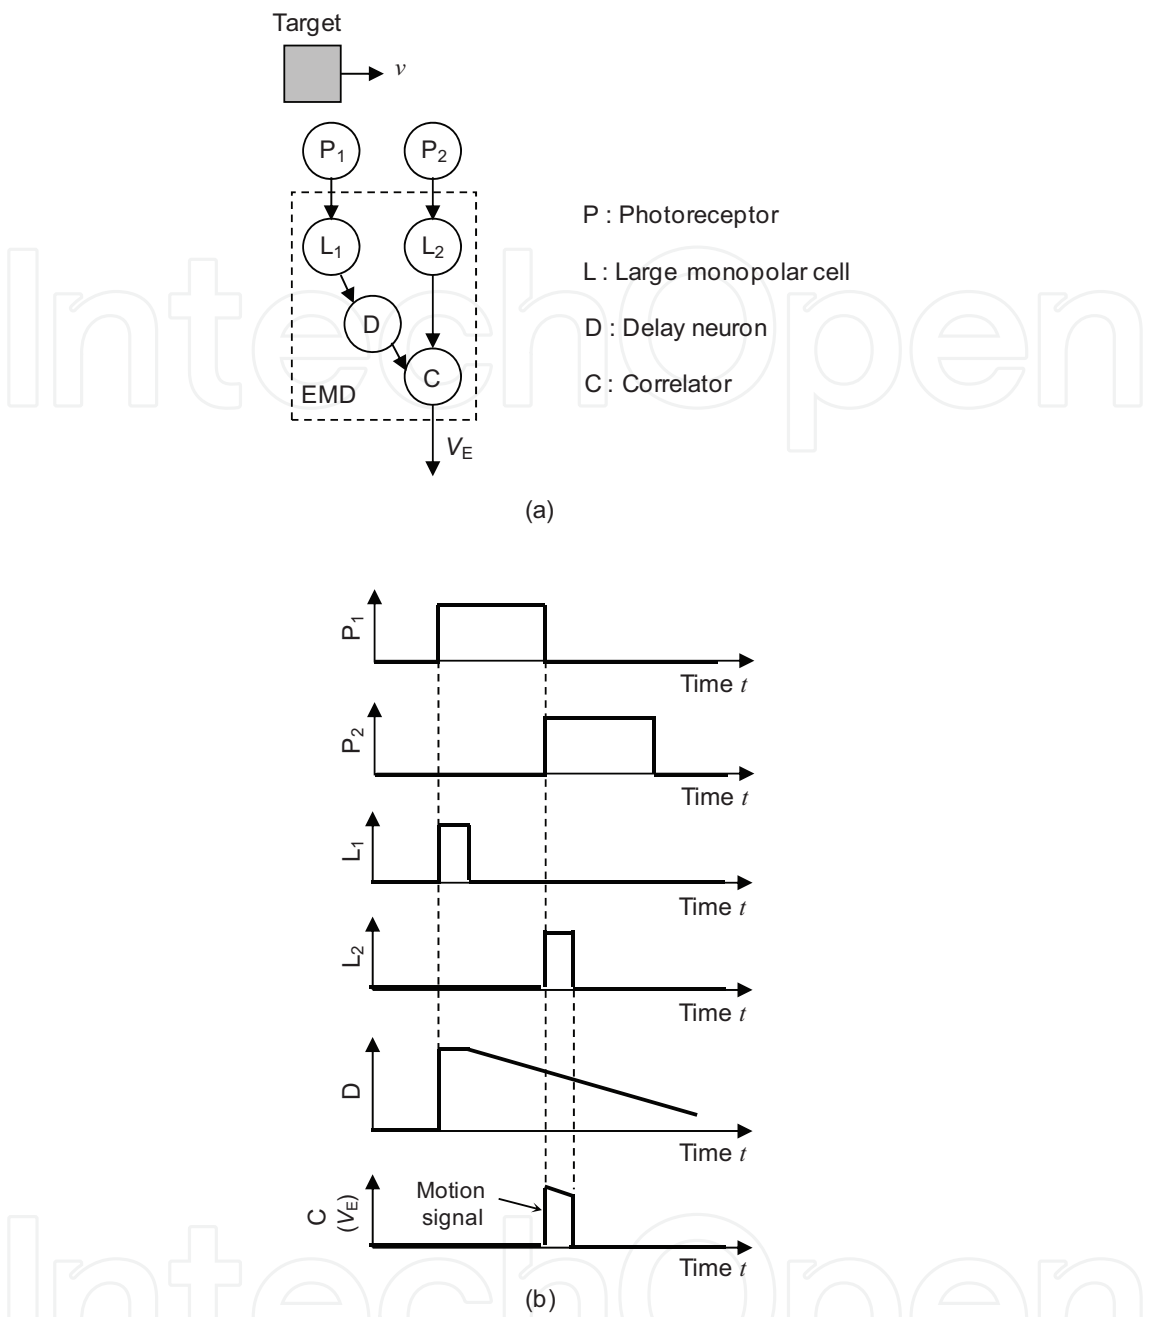


Fig. 1. Unit model for motion detection. (a) Model. (b) Transient response of each cell.

and  $V_D$  and  $I_D$  are decreased by  $MN_2$ . The current  $I_C$  is 0 since the nMOS transistor  $MN_4$  turns off when the target is not projected on  $PD_2$ .

The target moves toward the right side, and the target projected on  $PD_2$ . Then, the voltage  $V_{L2}$  becomes about  $V_{DD}$  and  $I_C$  is equal to  $I_D$  since  $MN_4$  turns on.  $I_C$  is converted to the output voltage  $V_E$  by the integration circuit constructed with the capacitor  $C_O$  and the nMOS transistor  $MN_5$  where the voltage  $V_{G2}$  is set to the constant value.  $V_E$  is proportional to the velocity of the target.

In the case that the circuit is applied to the target tracking system, the voltage  $V_{center}$  described in section 4 is generated by the PD located on the center of the array. When the target locates on the center of the input part,  $V_E$  shows about 0 by the nMOS transistor  $MN_6$ .



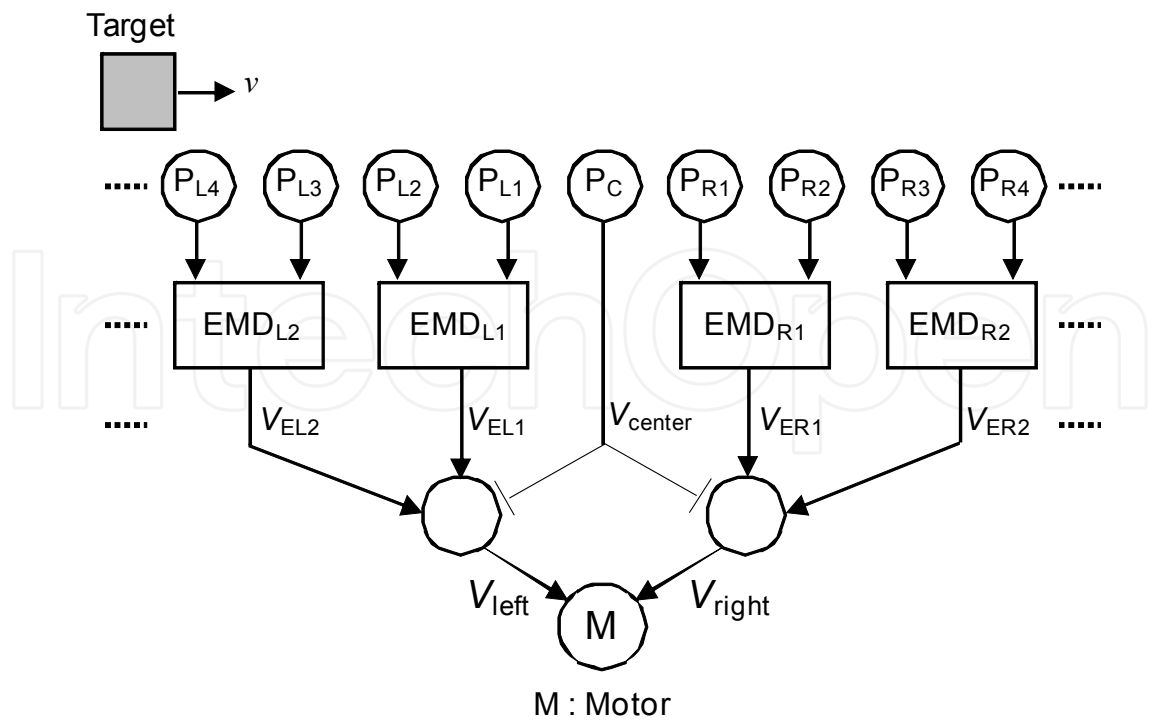


Fig. 3. Model for tracking the target based on the biological vision system.

$V_{\text{left}}$	$V_{\text{right}}$	Motor
0	0	Stop
0	$V_{\text{DD}}$	Normal rotation (track toward the right side)
$V_{\text{DD}}$	0	Reverse rotation (track toward the left side)
$V_{\text{DD}}$	$V_{\text{DD}}$	Stop

Table 1. Method for controlling the motor.

5. Test system for tracking the target using analog motion detection circuit

The test system for tracking the target was fabricated based on the model in Fig. 3. Figure 4 shows the photograph of the fabricated test system for tracking the target. It is able to track the target by arranging the unit circuits in Fig. 2 in one-dimensionally. The PD array fabricated on the printed board was placed on the rotating table which rotates with 360 degrees. I describe the test system for tracking the target in this section. In the subsection 5.1, the measured results of the test circuit for motion detection are described. The operation principle of the circuit for controlling the motor is also described in the subsection 5.2. The measured results of the test system are shown in subsection 5.3.

5.1 Motion detection circuit

The test circuits of Fig. 2 were fabricated on the printed board by using discrete MOS transistors (nMOS:2SK1398, pMOS:2SJ184, NEC). I measured the test circuit based on EMD applied to the tracking system. The supply voltage  $V_{\text{DD}}$  was set to 5 V.  $V_{\text{th}}$ ,  $V_{\text{G1}}$  and  $V_{\text{G2}}$  were set to 1 V, 0.8 V and 2 V, respectively.



The relationship between PD and the target (light) is shown in Fig. 5(a). The light is provided as the object. The light was moved toward the right side, i.e., the light moved on PD<sub>1</sub> and PD<sub>2</sub> sequentially. The output voltage  $V_E$  was monitored by the oscilloscope. The measured result of the output voltage of the motion detection circuit is shown in Fig. 5(b). When the light moved on PD<sub>2</sub>,  $V_E$  showed about 4.3 V. The test circuit could generate the motion signal. Thus, it is clarified from the results that the proposed circuit can operate normally.

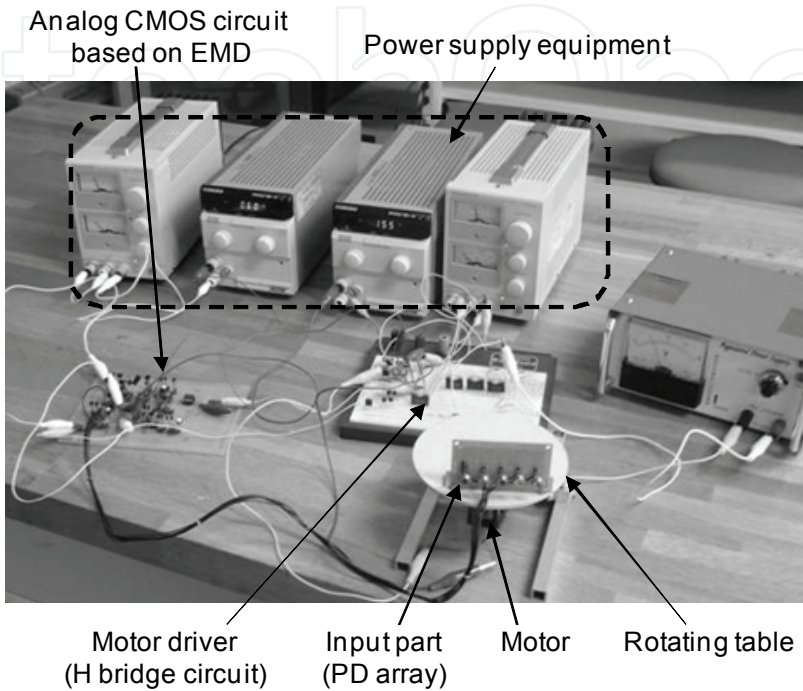


Fig. 4. Photograph of the fabricated test system for tracking the target.

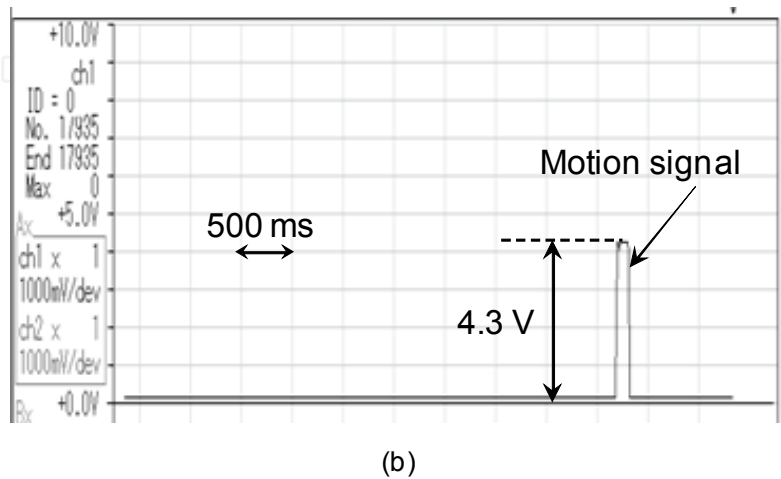
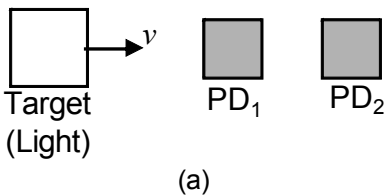


Fig. 5. Measured result of the test circuit for motion detection. (a) Relationship between PD and the target. (b) Result.

5.2 Motor driver

The motor driver (TA7257P, TOSHIBA) was used as the H bridge circuit, which was connected with the DC motor, as shown in Fig. 4. The H bridge circuit is used to control the motor by the voltages  $V_{left}$  and  $V_{right}$  generated by the tracking system in Fig. 3. Figure 6 shows the H bridge circuit. This circuit can control the normal rotation, inverse rotation and stop of the motor.

The motor rotates normally when the switches  $SW_1$  and  $SW_4$  turn on and  $SW_2$  and  $SW_3$  turn off, as shown in Fig. 6(a). When the  $SW_1$  and  $SW_4$  turn off and  $SW_2$  and  $SW_3$  turn on, as shown in Fig. 6(b), the motor rotates inversely. The motor stops when all switches turn off or turn on, as shown in Figs. 6(c) and (d).

To realize the condition table 1,  $V_{right}$  controls  $SW_1$  and  $SW_4$ . And  $V_{left}$  controls  $SW_2$  and  $SW_3$ . When  $V_{right}$  is about  $V_{DD}$  and  $V_{left}$  is 0,  $SW_1$  and  $SW_4$  turn on and the motor rotates normally. When  $V_{left}$  is about  $V_{DD}$  and  $V_{right}$  is 0,  $SW_2$  and  $SW_3$  turn on the motor rotates inversely.

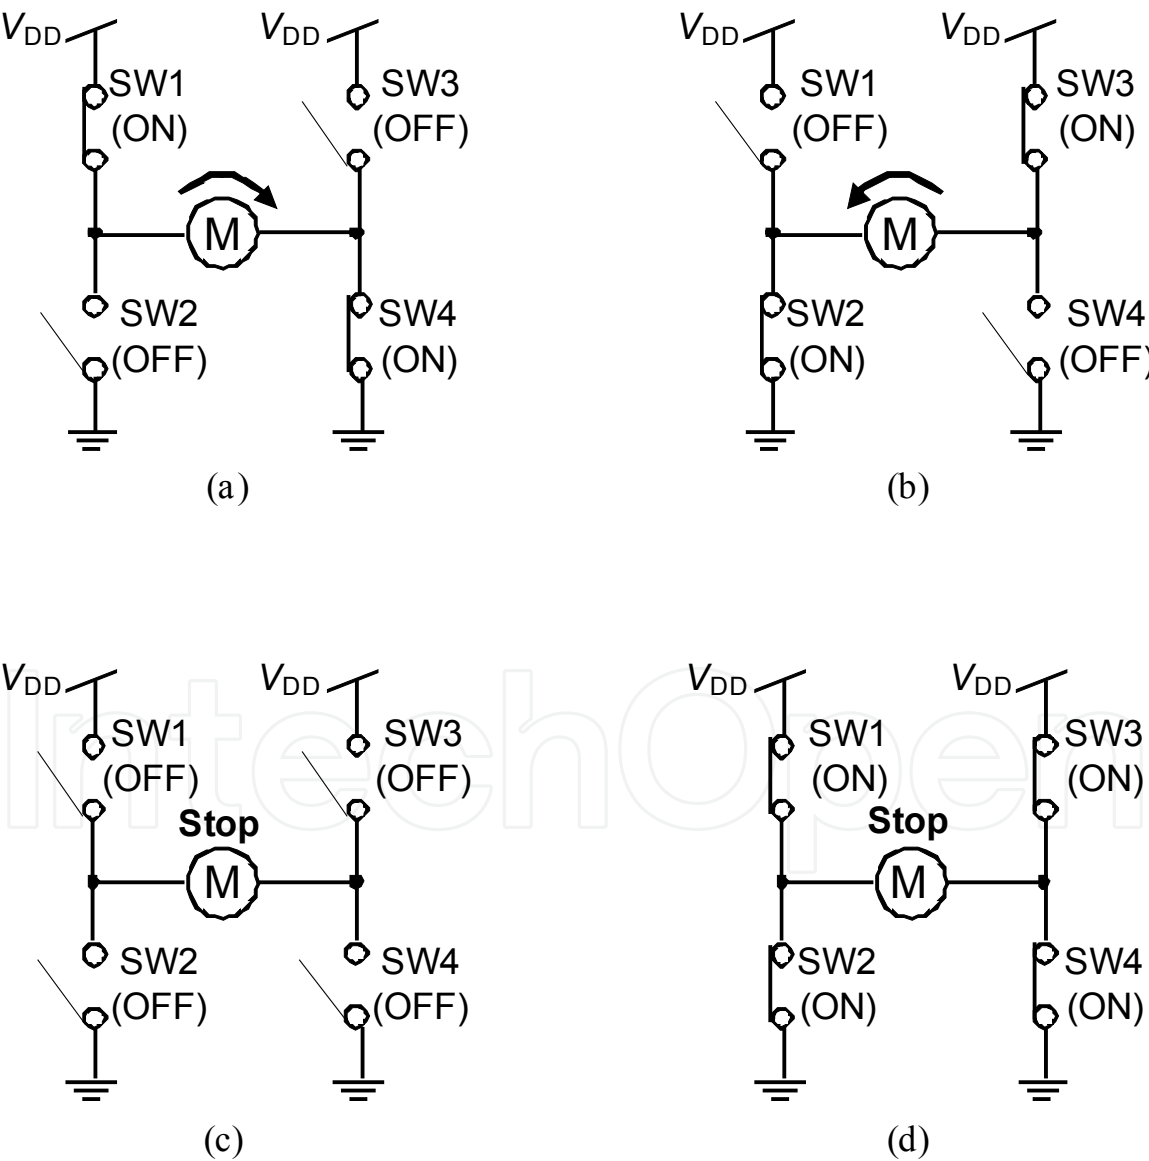


Fig. 6. H bridge circuit. (a) Normal rotation. (b) Inverse rotation. (c) Stop. (d) Stop.



5.3 Measured results of the test system

The fabricated test system for tracking the target in Fig. 4 was measured. Bias voltages set in subsection 5.1 were provided to the circuits based on EMD. As the target, the light was projected on PD array.

The measured results of the test system, when the target moves toward the left side, are shown in Fig. 7. The light was moved toward the left side until  $t=5$  s from  $t=0$  s. At  $t=5$  s, the light was stopped. The system tracked the light, as shown in images at  $t=4$  and 5 s. At  $t=6$  s, the motor of the system stopped, and the system could capture the target on the center of the PD array.

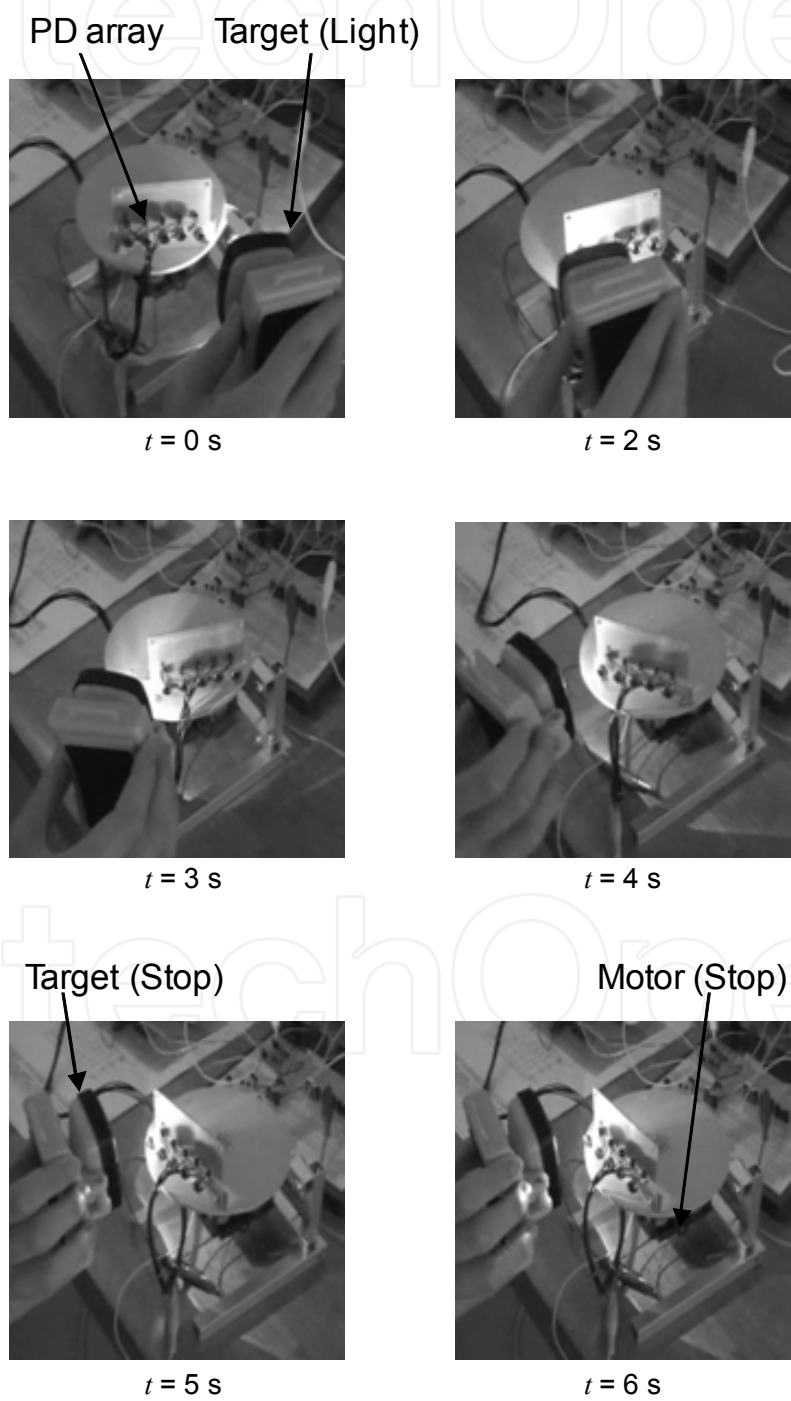


Fig. 7. Measured results of the test system when the target moves toward the left side.

The measured results of the test system, when the target moves toward the right side, are shown in Fig. 8. The light was moved toward the right side until about 3 s. The light was stopped at about 3 s. The system tracked the light toward the right side, as shown in images between  $t=0.5$  s and  $t=3$  s. As shown in the image at  $t=4$  s, the motor stopped and the system could capture the target. Thus, it was clarified from the results that the fabricated system can track the target and capture the target on the center of the PD array.

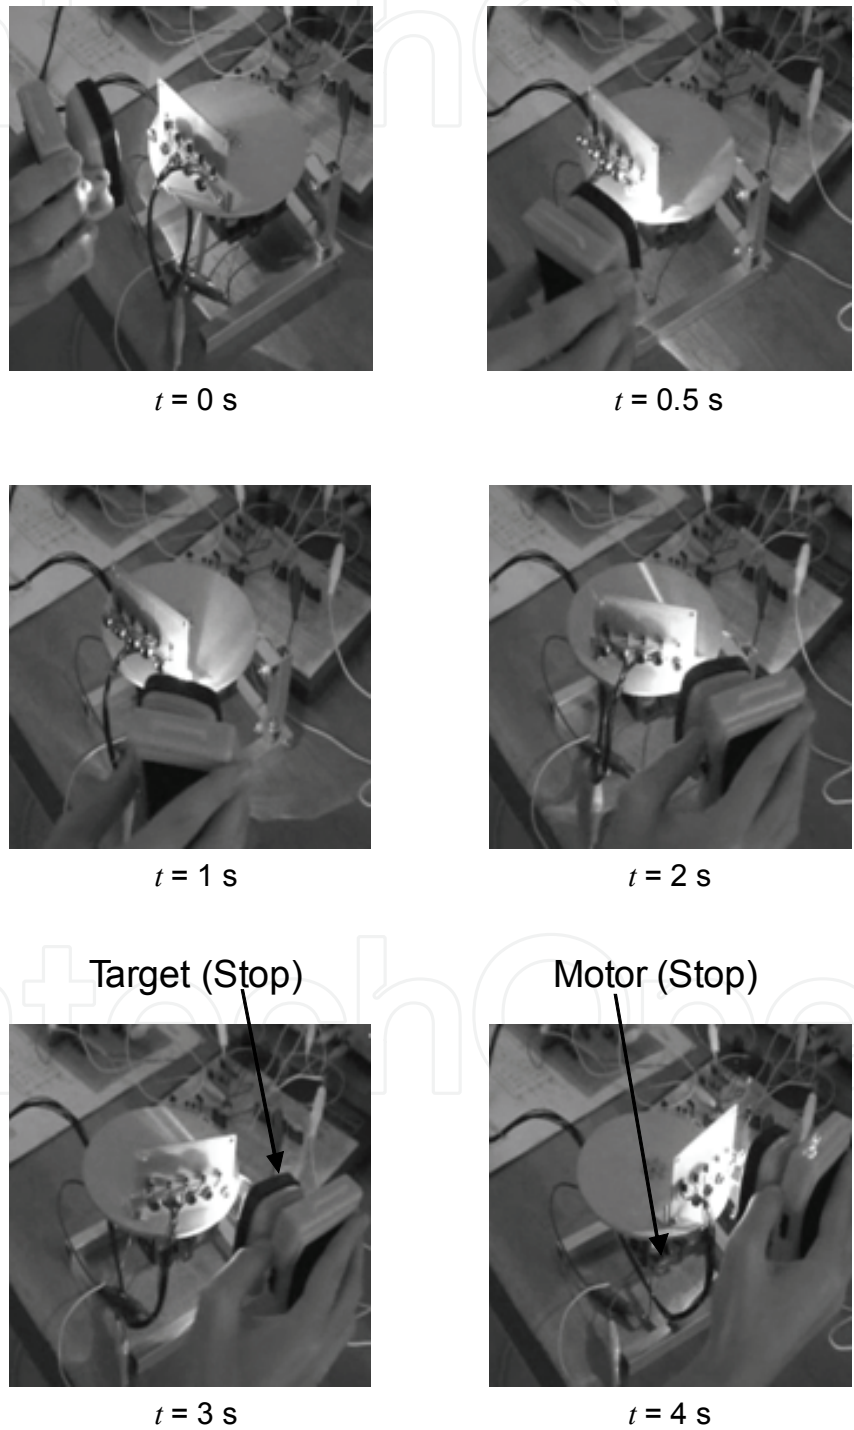



Fig. 8. Measured results of the test system when the target moves toward the right side.

## 6. Conclusion

In this study, the simple analog CMOS motion detection circuit was proposed based on the biological vision system. The simple circuits for motion detection were applied to the first stage of the target tracking system. The test circuit for motion detection was fabricated on the printed board by using discrete MOS transistors. The test system for tracking the target was fabricated by using the test circuit. The test circuit could generate the motion signal for controlling the motor of the system. The test system could track the target and capture the target on the center of the input part. By using proposed basic circuits and system for tracking the target, we can expect to realize the novel visual sensor for robotics system, monitoring system and others.

## 7. References

- Asai, T.; Ohtani, M.; Yonezu, H. & Ohshima, N. (1999a). Analog MOS Circuit Systems Performing the Visual Tracking with Bio-Inspired Simple Networks, *Proc. of the 7th International Conf. on Microelectronics for Neural Networks, Evolutionary & Fuzzy Systems*, pp. 240-246
- Asai, T.; Ohtani, M. & Yonezu, H. (1999b). Analog MOS Circuits for Motion Detection Based on Correlation Neural Networks, *Jpn. J. Appl. Phys.*, Vol.38, pp.2256-2261
- Liu, S. (2000). A Neuromorphic a VLSI Model of Global Motion Processing in the Fly, *IEEE Trans. Circuits and Systems II*, Vol. 47, pp. 1458-146
- Liu, S. & Viretta, A. (2001). Fly-Like Visuomotor Responses of a Robot Using a VLSI Motion-Sensitive Chips, *Biological Cybernetics*, Vol. 85, pp. 449-457
- Mead, C. (1989) *Analog VLSI and neural systems*, Addison Wesley, New York
- Moini, A. (1999) *Vision Chips*, Kluwer Academic, Norwell, MA
- Nishio, K.; Yonezu, H.; Ohtani, M.; Yamada, H.; & Furukawa, Y. (2003). Analog Metal-Oxide-Semiconductor Integrated Circuits Implementation of Approach Detection with Simple-Shape Recognition Based on Visual Systems of Lower Animals, *Optical Review*, Vol. 10, pp. 96-105
- Nishio, K.; Matsuzaka, K. & Irie, N. (2004). Analog CMOS Circuit Implementation of Motion Detection with Wide Dynamic Range Based on Vertebrate Retina, *Proc. of 2004 IEEE Conf. on Cybernetics and Intelligent Systems*, 2004
- Nishio, K.; Matsuzaka, K. & Yonezu, H. (2007). Simple Analog Complementary Metal Oxide Semiconductor Circuit for Generating Motion Signal, *Optical Review*, Vol. 14, pp. 282-289
- Reichardt, W. (1961) *Principles of Sensory Communication*, Wiley, New York
- Yamada, H.; Miyashita, T.; Ohtani, M.; Nishio, K.; Yonezu, H.; & Furukawa, Y. (2001). Signal Formation of Image-Edge Motion Based on Biological Retinal Networks and Implementation into an Analog Metal-Oxide-Silicon Circuit, *Optical Review*, Vol. 8, pp. 336-342

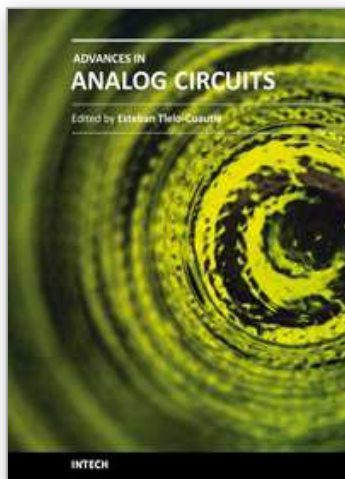

### **Advances in Analog Circuits**

Edited by Prof. Esteban Tlelo-Cuautle

ISBN 978-953-307-323-1

Hard cover, 368 pages

**Publisher** InTech

**Published online** 02, February, 2011

**Published in print edition** February, 2011

This book highlights key design issues and challenges to guarantee the development of successful applications of analog circuits. Researchers around the world share acquired experience and insights to develop advances in analog circuit design, modeling and simulation. The key contributions of the sixteen chapters focus on recent advances in analog circuits to accomplish academic or industrial target specifications.

### **How to reference**

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Kimihiro Nishio (2011). Analog Circuit for Motion Detection Applied to Target Tracking System, Advances in Analog Circuits, Prof. Esteban Tlelo-Cuautle (Ed.), ISBN: 978-953-307-323-1, InTech, Available from: <http://www.intechopen.com/books/advances-in-analog-circuits/analog-circuit-for-motion-detection-applied-to-target-tracking-system>

**INTECH**  
open science | open minds

### **InTech Europe**

University Campus STeP Ri  
Slavka Krautzeka 83/A  
51000 Rijeka, Croatia  
Phone: +385 (51) 770 447  
Fax: +385 (51) 686 166  
[www.intechopen.com](http://www.intechopen.com)

### **InTech China**

Unit 405, Office Block, Hotel Equatorial Shanghai  
No.65, Yan An Road (West), Shanghai, 200040, China  
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元  
Phone: +86-21-62489820  
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen